

ViewSonic[®]



Signage Manager Software User Manual

Thank you for choosing ViewSonic

With over 25 years as a world leading provider of visual solutions, ViewSonic is dedicated to exceeding the world's expectations for technological evolution, innovation, and simplicity. At ViewSonic, we believe that our products have the potential to make a positive impact in the world, and we are confident that the ViewSonic product you have chosen will serve you well.

Once again, thank you for choosing ViewSonic !



Contents

1. Overview

1.1 Content management Overview.....	1
--------------------------------------	---

2. Installation

2.1 Minimum system requirements	2
2.2 Setup process.....	2

3. UI Overview

3.1 Main Menu.....	3
3.2 Template List	3
3.3 Presentation Editor	4
3.4 Schedule Editor	5
3.5 Event Editor	5
3.6 User Operation Flow	6

4. Basic Operations

4.1 Create Playlist.....	7
4.1.1 Create Playlist.....	7
4.1.2 Edit from existing playlist.....	8
4.1.3 Duplicate existing playlist	8
4.2 Edit Presentation	9
4.2.1 Add looping playback media items by drag and drop.....	9
4.2.2 Add looping playback media items from panel	9
4.2.3 Edit image	10
4.2.4 Edit video	12
4.2.5 Edit PowerPoint file	13
4.2.6 Edit Logo	14
4.2.7 Edit Widget.....	14
4.2.8 Adding Ticker	15
4.2.9 Edit text.....	17
4.2.10 Switch theme and Toggle logo display	18
4.2.11 Adding background music.....	18
4.2.12 Switch between presentations.....	18
4.3 Edit Schedule.....	19
4.3.1 Edit text	19
4.3.2 Edit weekly schedule.....	20
4.3.3 Edit monthly schedule	20

4.3.4 Edit schedule for a specific period.....	20
4.3.5 Add presentations to an event.....	20
4.3.6 Schedule priority	21
4.3.7 Add presentations to an event.....	22
4.3.8 Duplicate a presentation to an event.....	24
4.3.9 Duplicate an event.....	24
4.3.10 Adding trigger event	25
4.4 Export Playlist	26
4.4.1 Export playlist via USB	26
4.4.2 Export playlist via Network	26
4.4.3 Player association	28
4.5 Serial protocol (RS232) configuration	29
4.6 Firmware Update	31
4.7 Widget Update	32
4.7.1 Update the Widget	32
4.7.2 Use the Widget.....	34
4.8 Update Signage Manager	35
4.9 Layout Editor.....	35


Other Information

Customer Support.....	39
-----------------------	----

1. Overview

Welcome to Signage Manager, an easy and simple way to manage digital signage content for ViewSonic digital signage media players. The Signage Manager software is designed to be easy to use by leveraging the power of your personal computer. Anyone with basic computer skills can quickly create or modify content playback schedules, using Signage Manager to deliver the right message to the right audience at the right times.

1.1 Content management Overview

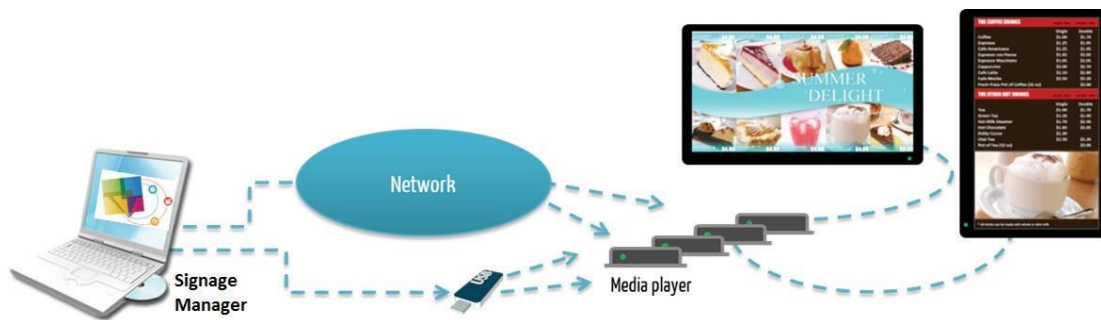


2. Installation

2.1 Minimum system requirements

Windows Vista, 7 or 8 Operating System	2.6 GHz CPU
.DirectX 9	2 GB of system memory
.NET Framework 4	20 GB hard drive space

2.2 Setup process

Run the installer and follow the step by step instructions. Close the installer to finish installation.

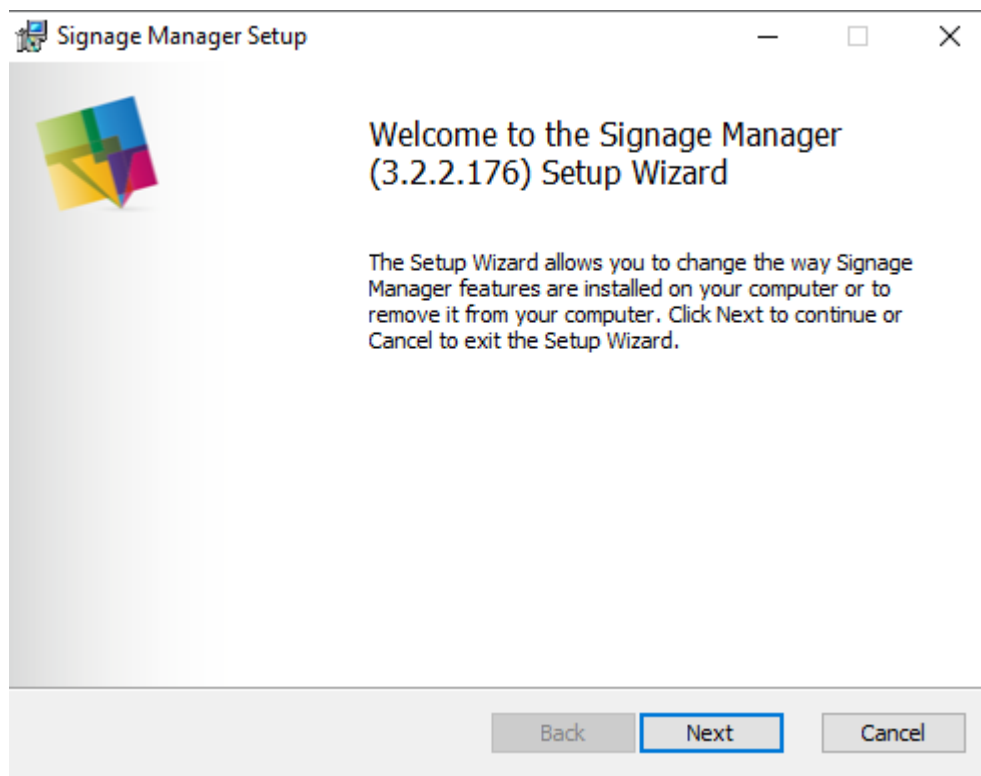


3. UI Overview

3.1 Main Menu

The main menu is composed of a list of existing playlists and a list of players available for playlist assignment.

You can drag players into/out of a playlist to make it associated/ unassociated with the playlist. Double click a playlist to edit it.

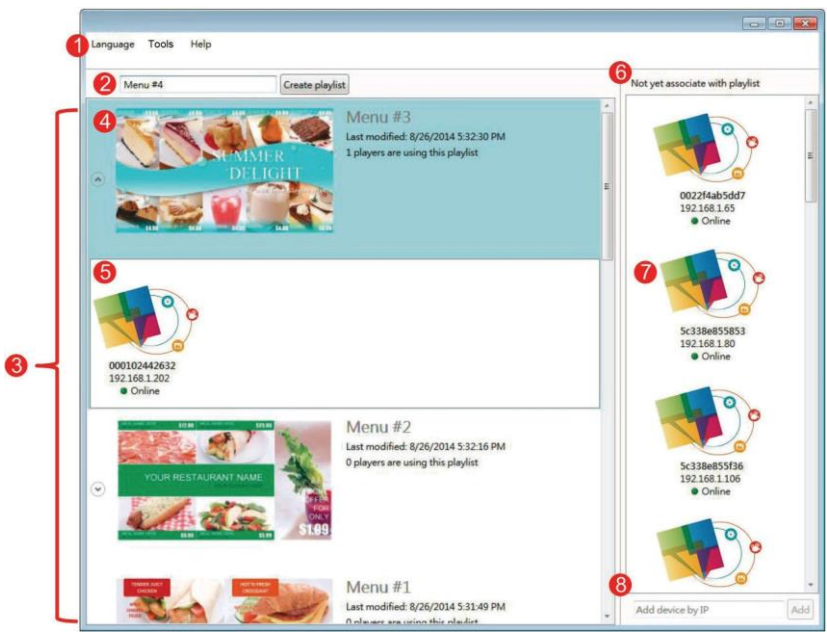

- 1 Tool bar
 - Language option\
 - Tools
 - Help information
- 2 Playlist name field and Playlist create button
- 3 List of existing Playlists
- 4 Playlist preview and info
- 5 The associated players of the playlist
- 6 Player list
- 7 Player name, IP, status
- 8 Player IP field and player search/add button

3.2 Template List

Template list contains all the presentation templates available to start a new playlist.



- 1 Template filter
- 2 Available templates

3.3 Presentation Editor

Presentation editor allows you to edit all the media content: text, pictures and video in a presentation.



- 1 Volume control
- 2 Screen off control
- 3 Switch presentations
- 4 Expand/Hide tool menu
- 5 Editing zone
- 6 Zoom or Fit options
- 7 Change content
- 8 Confirm/Cancel change
- 9 Expand/Hide media list
- 10 Media list for this zone
- 11 Add more media files
- 12 Media information
Thumbnail
File name
Options


It also allows you to save the playlist, export the playlist to players/USB, or enter schedule editor if you need to schedule the playback.



- 1 Back to Main menu
- 2 Edit Playlist Schedule
- 3 Save and export
- 4 Select export target (player or USB)
- 5 Discard all changes
- 6 Editing zone

3.4 Schedule Editor




Schedule Editor helps you create flexible playlist containing multiple presentations which will play automatically according to pre-defined events (time slots).

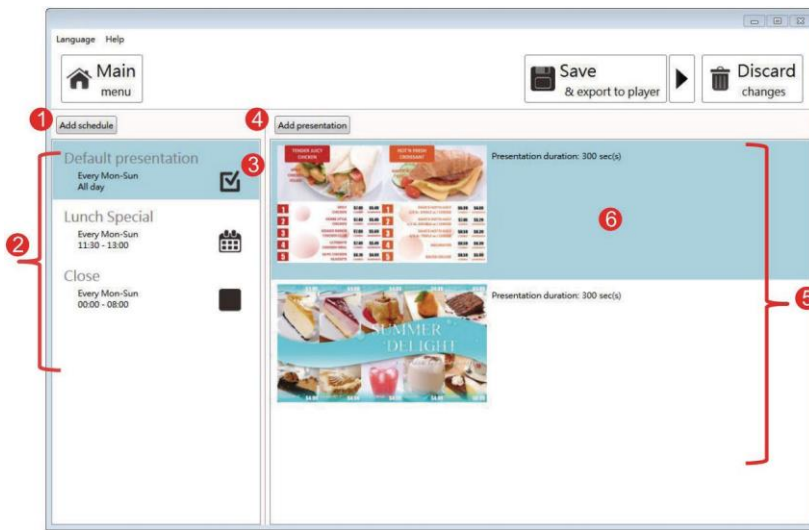

- 1 Add event schedule
- 2 Existing events
- 3 Event information
Time slot
Event Day/Date
Event Type
- 4 Add new presentation to current event
- 5 Existing presentations in current event
- 6 Presentation information
Thumbnail
Duration


3.5 Event Editor

Event Editor lets you define how and when you want the event to take place.

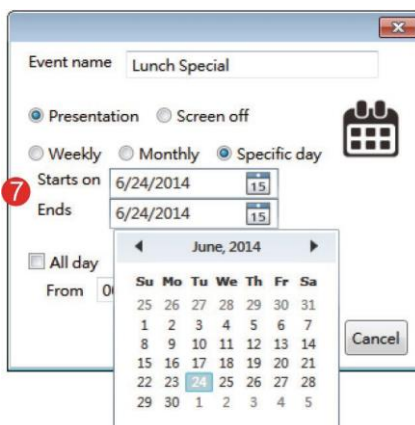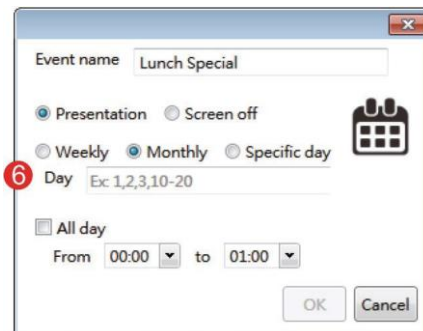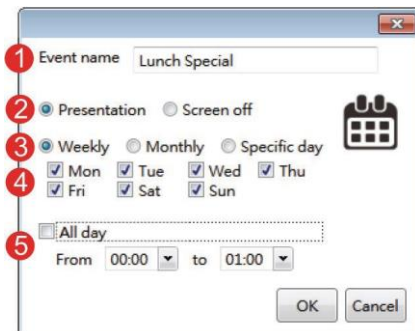

- 1 Name of the event
- 2 Event type
- 3 Recurrence type
- 4 Day picker for weekly event
- 5 Time slot
- 6 Day picker for monthly event
- 7 Day picker for specific day event

3.6 User Operation Flow

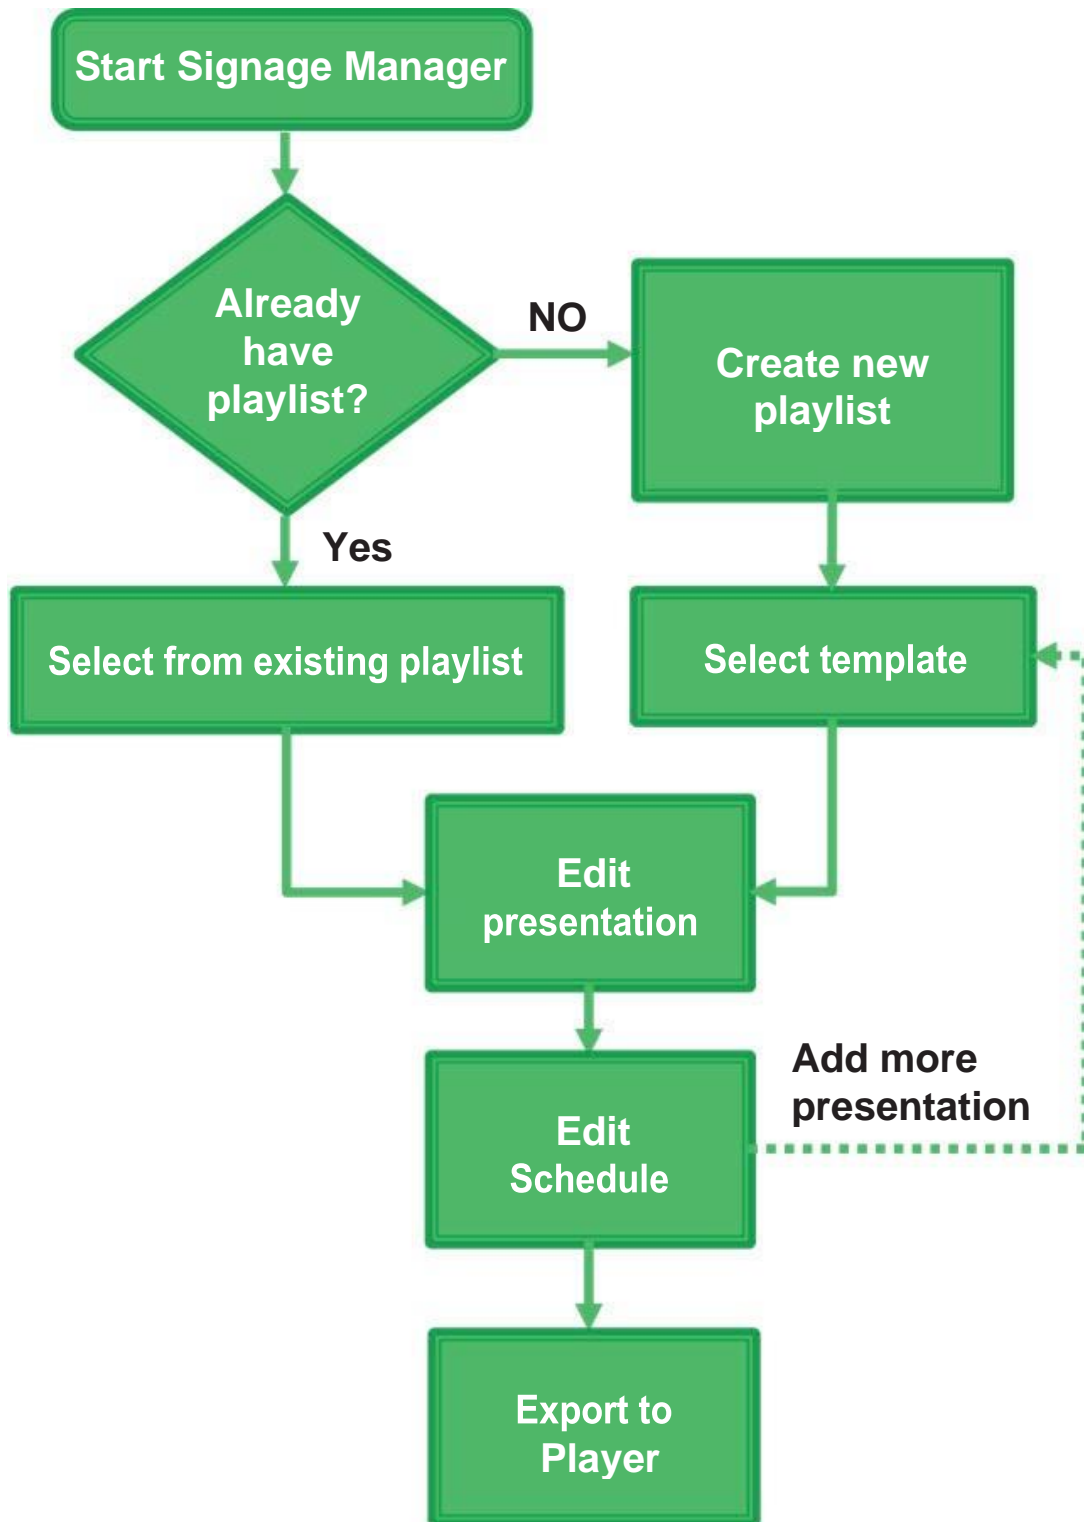


4. Basic Operations


4.1 Create Playlist

4.1.1 Create Playlist

1. Input a playlist name and then click “Create playlist”

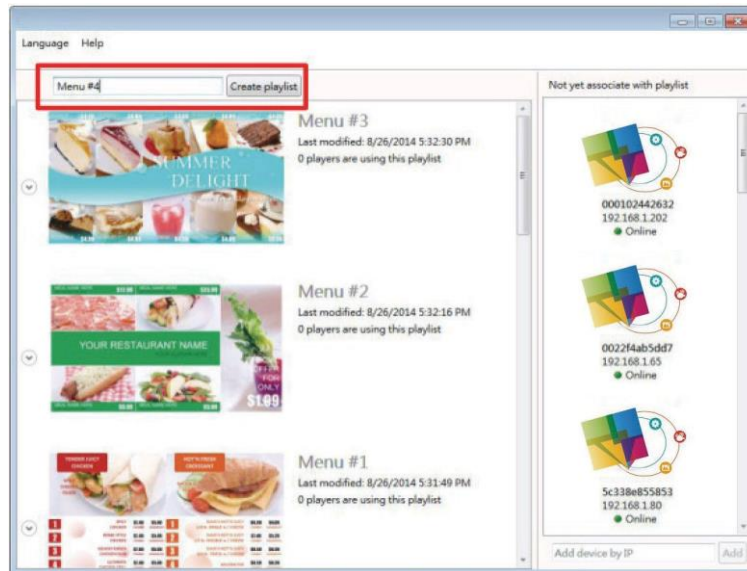


2. Double click a template to make your selection

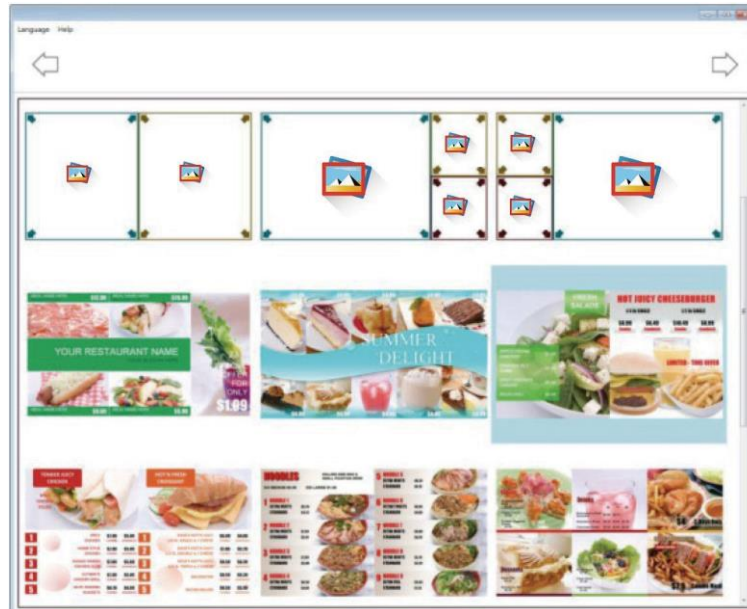


4.1.2 Edit from existing playlist

Double click on an existing playlist to edit.

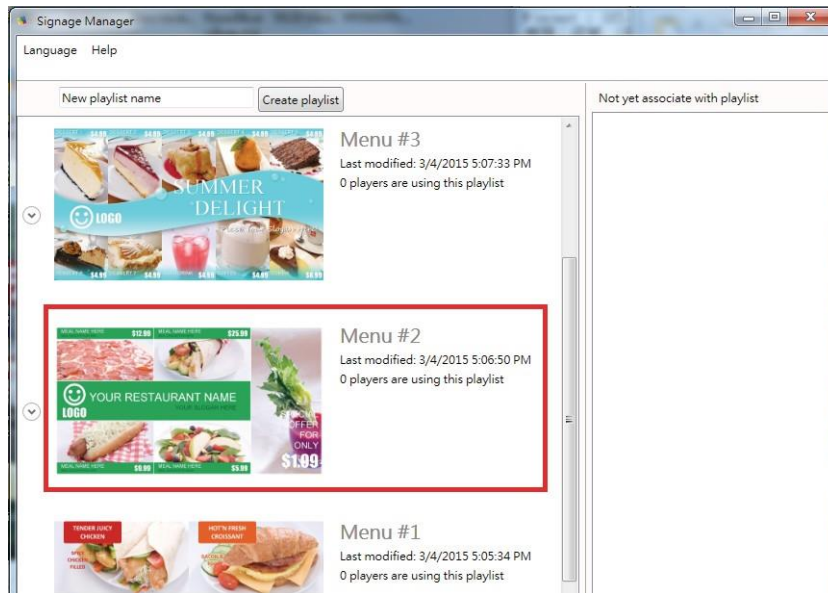

4.1.3 Duplicate existing playlist


Click on Duplicate button of an existing playlist to copy the playlist.

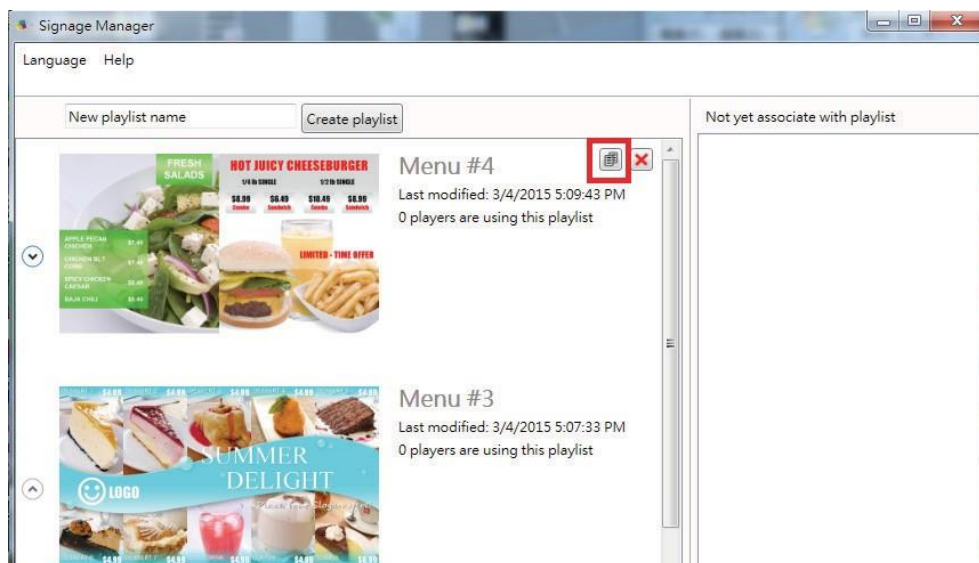

4.2 Edit Presentation

4.2.1 Add looping playback media items by drag and drop

Select a zone then simply drag and drop media from file explorer to the zone.

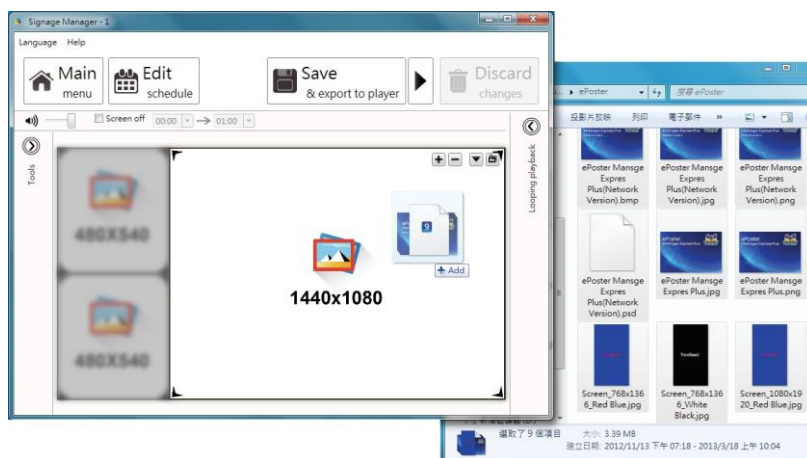

4.2.2 Add looping playback media items from panel

1. Select a region then expanding the option panel.



2. Add new image/video/powerpoint/widget and edit their attributes.



Click  to add more media to the zone

Click  to add special media to the zone:

Widget 

A/V input 


Note: Drag and drop to change the playback order.

4.2.3 Edit image

1. Move mouse around the template, editable area will be highlighted.
2. Click to start editing.




3. You can replace the default image, zoom-in/out and adjust the focus. Click confirm when you are done.

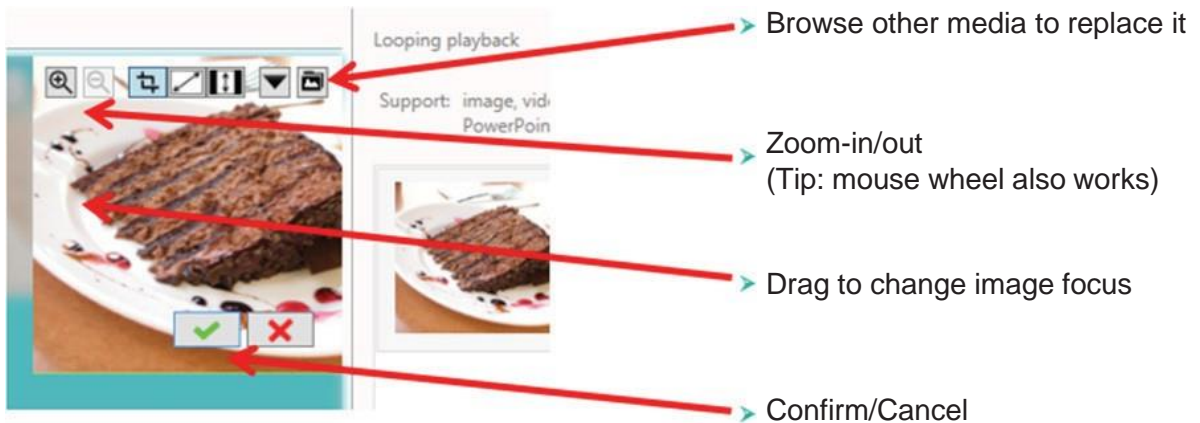

Configurable options	Options
Duration	Playback duration (seconds)
Display option	Crop (default option which allows user to change focus freely)
	Fit (fit image inside the zone and maintain its aspect ratio)
	Stretch (fill image inside the zone without maintaining its aspect ratio)

Note: Use mouse wheel to quickly zoom-in/out.

4. Playback duration and other options can be configured from Option dialog, to launch the Option dialog:
- double click on media item
 - click right mouse button and select Option.

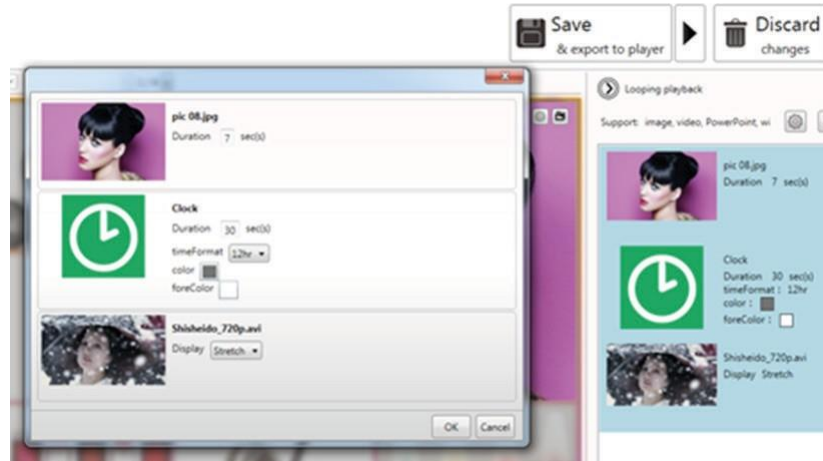

Note: To select multiple items, click the first item, press and hold down the Ctrl key, and then click the next item.

4.2.4 Edit video

1. Add video files to a region, a video thumbnail will show in the region.
2. Choose to fit inside the region or stretch video to the region.



: Fit inside



: Stretch




Note: Only ONE zone is allowed to contain video files.

Note: Double click the video to preview the playback in Windows application.


Configurable options	Options
Display	Fit/Stretch

4.2.5 Edit PowerPoint file

1. Add powerpoint file to a zone and click on the item to start editing.

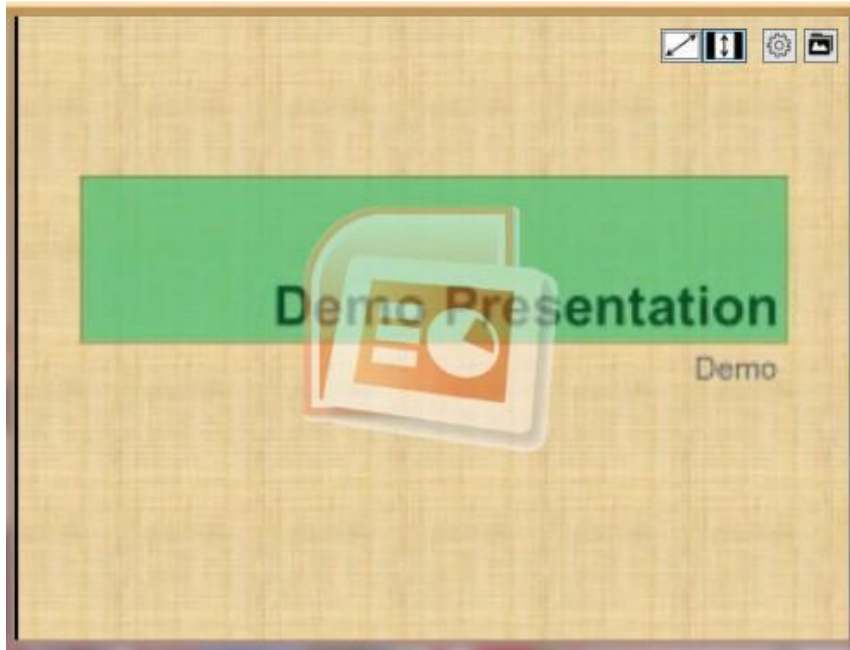

2. Choose to fit inside the zone or stretch PowerPoint to the zone.

 : Fit inside

 : Stretch

Note: Export PowerPoint slides (in static only) if you have PowerPoint 2003/2007/2010/2013 installed in same computer.

Note: Double click the file to edit in PowerPoint

Configurable options	Options
Display	Fit/Stretch
Unspecified slide duration	Playback duration for each slide (seconds)

4.2.6 Edit Logo

1. Click on LOGO icon to edit LOGO (LOGO only supported in limited Templates).



2. You can replace the image, zoom-in/out and adjust the focus. Click confirm when you are done.

4.2.7 Edit Widget

Add widget files to a region and click on the item to start editing.



Configurable options	Options
Common	Playback duration: seconds
Options	Color: background color foreColor: text color
Clock	timeFormat : 12h/24h
Calendar	timeFormat : 12h/24h Align: right/center/left
Weather	Cities: type city name listed in - http://www.worldweatheronline.com/country.aspx Scale : C/F Key : worldweather online API Key
RSS	Urls: RSS URL Writing direction:Right to Left/Left to Right
Webpage	URL: website URL

4.2.8 Adding Ticker

Choose one of the empty templates to use ticker

in the Tools panel, check Ticker to enable it

Select a preferred ticker mode from one of the options:

- Personal text: to display text content from a .txt file
- Widget: to display a widget in the ticker zone (ex. RSS widget or custom widgets)

Option

Ticker

File: C:\Users\ChuAn\Desktop\FTP address.txt

Duration: 30 sec(s)

Size: Normal

Effect: Static

Background color: [Color Picker]

Background opacity: 50%


Text color: [Color Picker]

OK Cancel

Configurable options	Options
File	Path to the .txt file
Duration	Playback duration in seconds
Size	The text size of the ticker Available options: small/normal/large
Effect	Transition effect of the ticker Available options: Static: no transition effect between lines Crawl: ticker crawls from right to left Scroll: ticker scrolls up
Background color	Select ticker zone background color from color palette
Background opacity	Level of transparency of the ticker background
Text color	Select text color from color palette
Writing direction	Left to right/Right to left

After enabling the ticker, you can:

1. Change the location of the ticker to Bottom or Top
2. Adding more .txt file or widgets to the zone

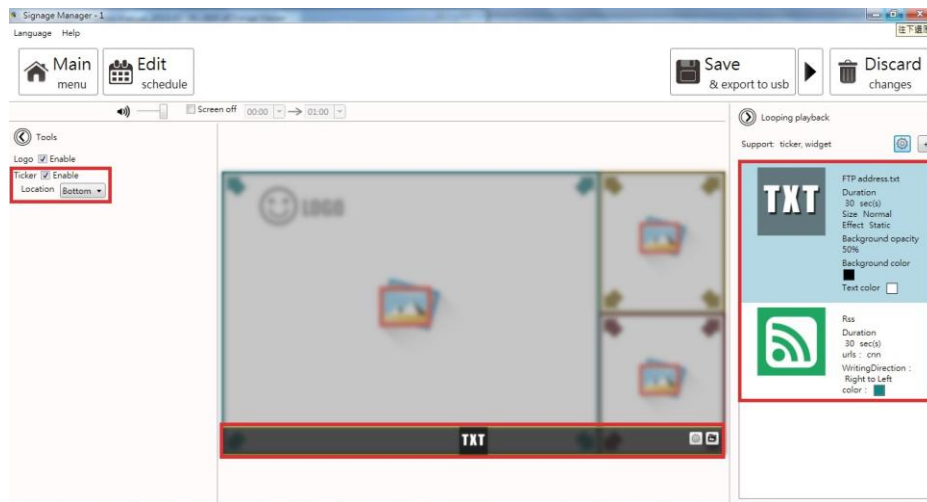


4.2.9 Edit text

1. Editable text will get highlighted with yellow box when hovering on it. Click the text to start editing.



2. Expand option to change font type, size and color.

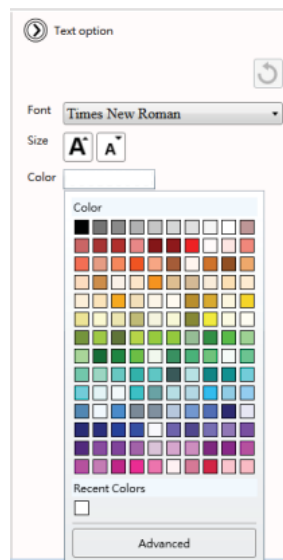


3. If the text belongs to a text group, changing its style would affect on all text in the same group.




4.2.10 Switch theme and Toggle logo display

Expand Tools panel to toggle logo display and choose a different color theme.

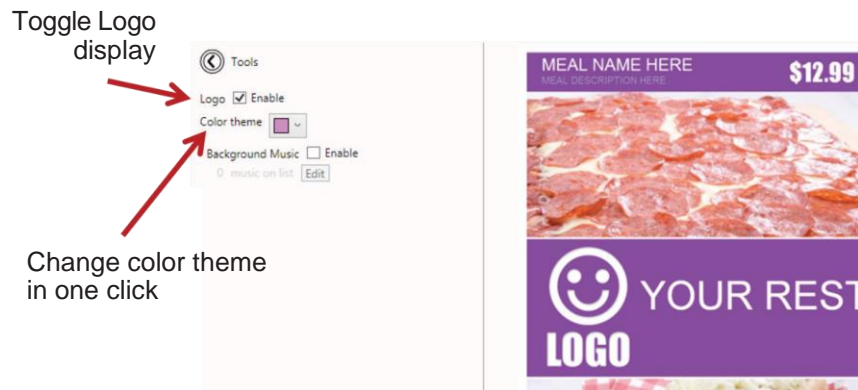

4.2.11 Adding background music

Background music only works with image/PowerPoint presentation. If presentation contains video, an information message will show up to ask user to remove video from presentation before adding background music.

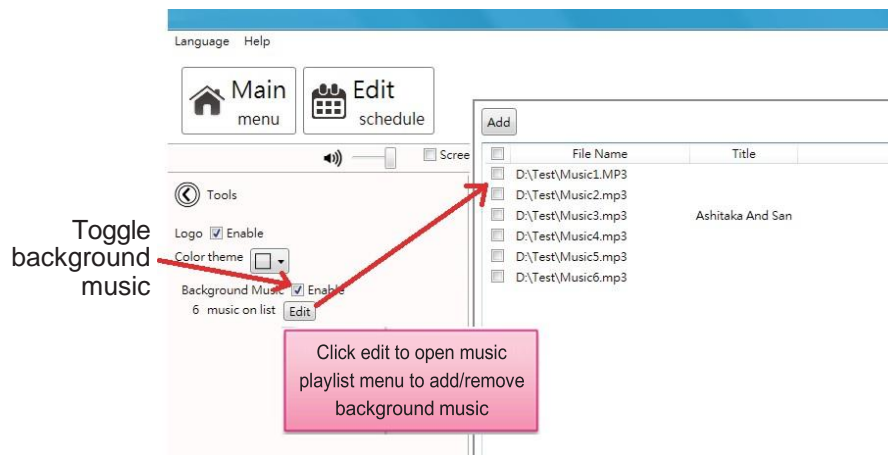


4.2.12 Switch between presentations

If more than one presentation exist in same event schedule, switching between presentations can be done by the switch as shown below.




4.3 Edit Schedule


Click Edit schedule to enter schedule editor.

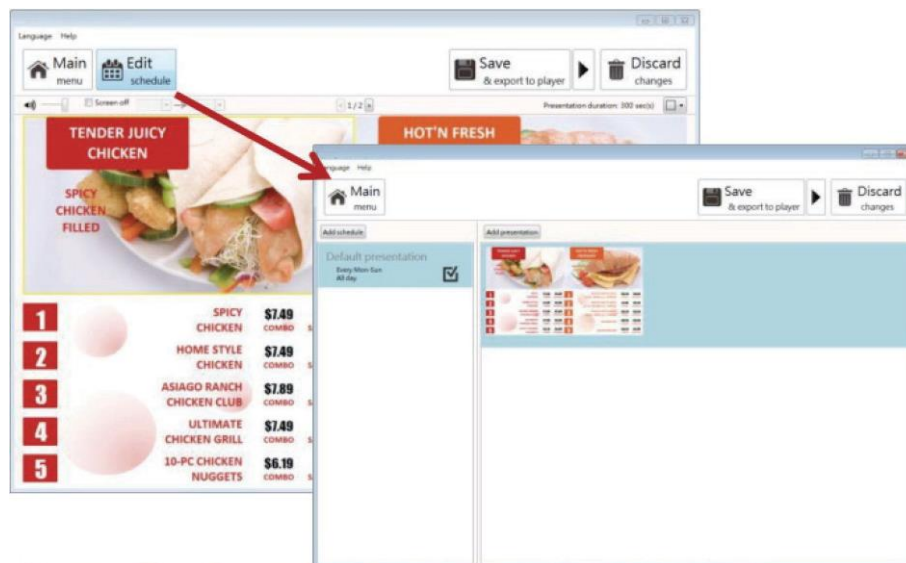

4.3.1 Edit text

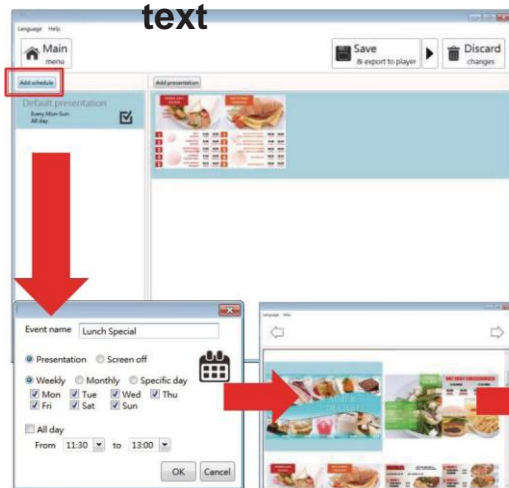

1. Click Add event schedule
2. Edit the event schedule
3. Select template
4. Edit the newly added presentation

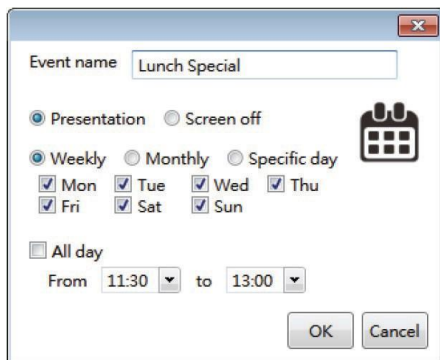

1. Specify event name
2. Choose an event type
 - Presentation
 - Screen off
3. Select recurrence type and the day
4. Select the playing period
 - All day
 - Specific time slot

4.3.2 Edit weekly schedule

Check/uncheck the weekdays:

Weekly Monthly Specific day

Mon Tue Wed Thu
 Fri Sat Sun

4.3.3 Edit monthly schedule

Enter days separated by comma “,” or period connected by dash “-“, for example: 1, 5, 9, 15-18 will play on 1st, 5th, 9th, 15th, 16th, 17th, 18th of each month.

Weekly Monthly Specific day

Day

4.3.4 Edit schedule for a specific period

Pick start and end day from the calendar

Weekly Monthly Specific day

Starts from

Ends at

June, 2014


Su	Mo	Tu	We	Th	Fr	Sa
25	26	27	28	29	30	31
1	2	3	4	5	6	7
8	9	10	11	12	13	14
15	16	17	18	19	20	21
22	23	24	25	26	27	28
29	30	1	2	3	4	5

4.3.5 Add presentations to an event



1. Click Add presentation
2. Select template
3. Edit the newly added presentation

4.3.6 Schedule priority

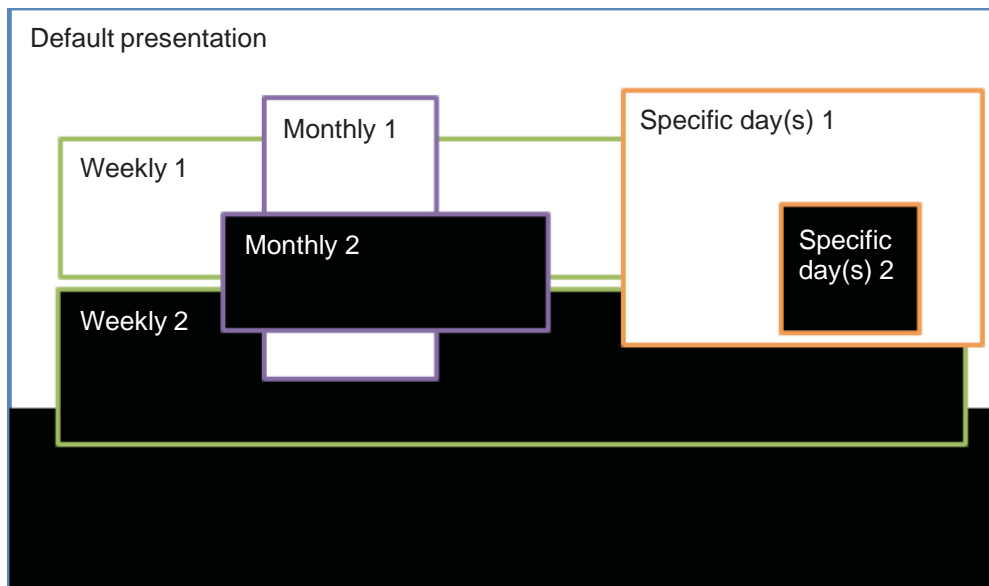

Default presentation is the initial schedule which is defaulted to play 24/7. It has lowest priority, will be surpassed whenever there are overlapping with other schedule.

As shown on diagram above, specific day(s) event has the highest priority of playback when schedules are overlapping, Monthly schedule has 2nd highest priority then its weekly schedule.

Among same recurrence type, newly added schedule takes higher priority (e.g. Weekly 2 is the newly added schedule)

Default presentation

Every Mon-Sun
All day



Weekly 1

Every Mon-Sun
00:00 - 18:00




Weekly 2

Every Mon-Sun
00:00 - 18:00




4.3.7 Add presentations to an event


1. Click Add presentation.

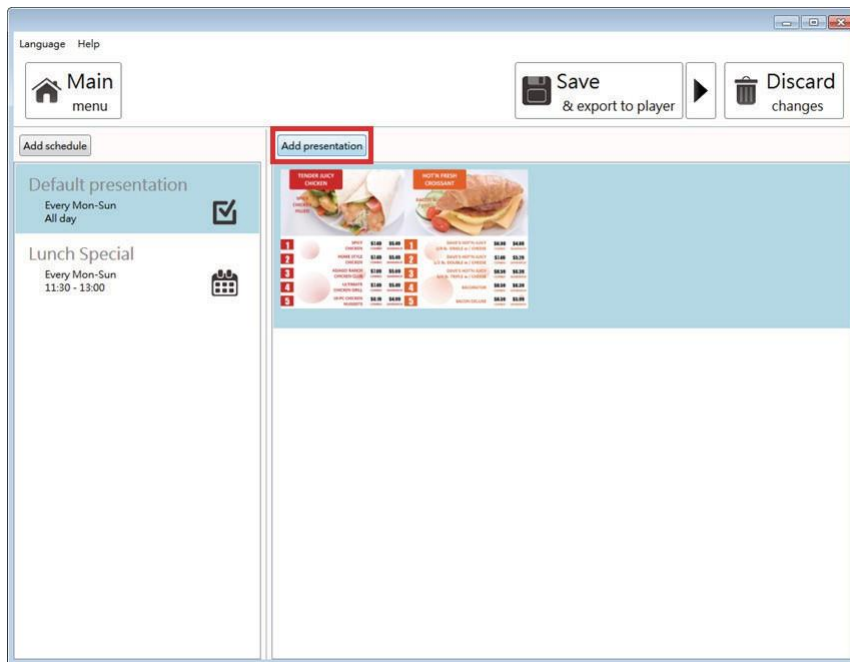

2. Select template.

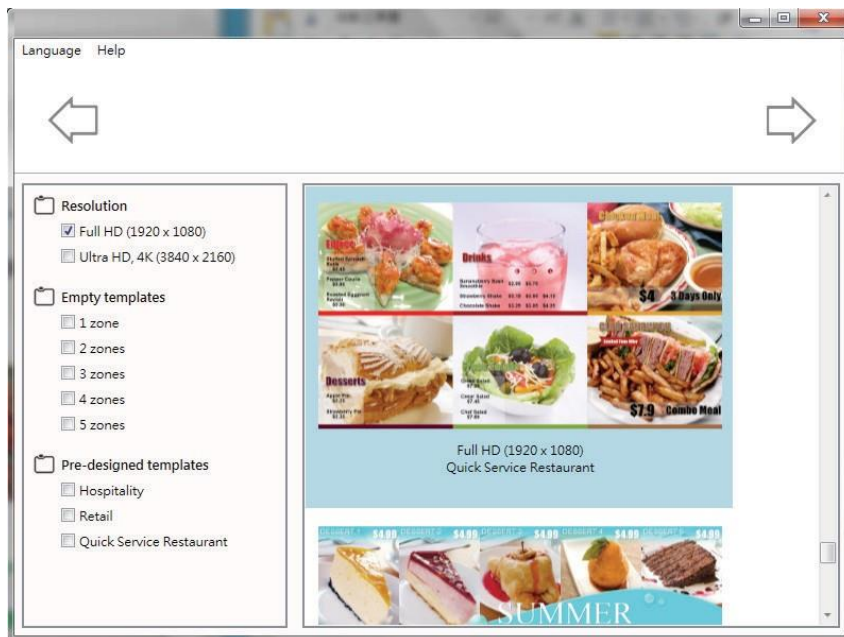


3. Edit the newly added presentation.

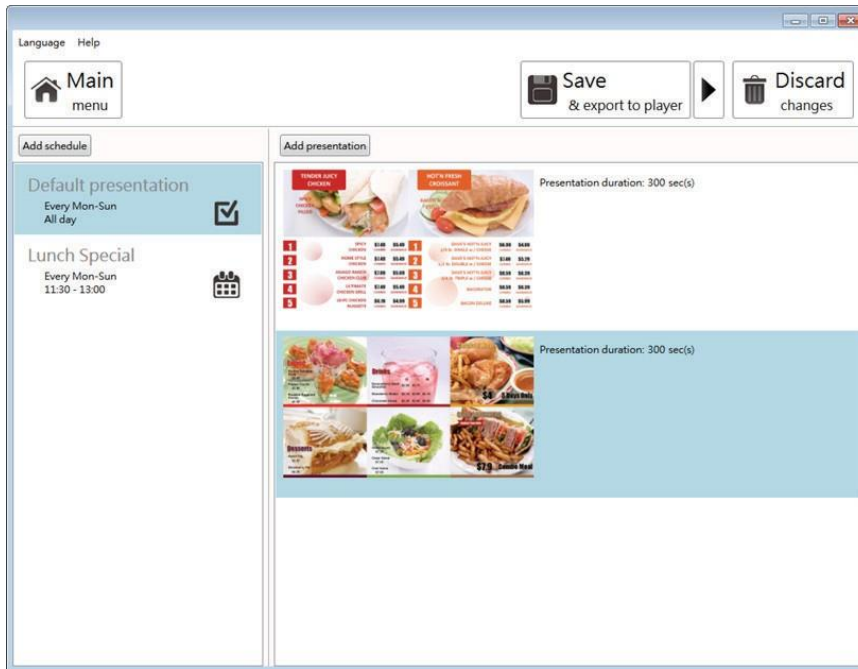

When looping presentation has more than 1 presentation, duration box will appear. Click on Presentation duration number(300) to change duration, default duration is 300 seconds.




4.3.8 Duplicate a presentation to an event

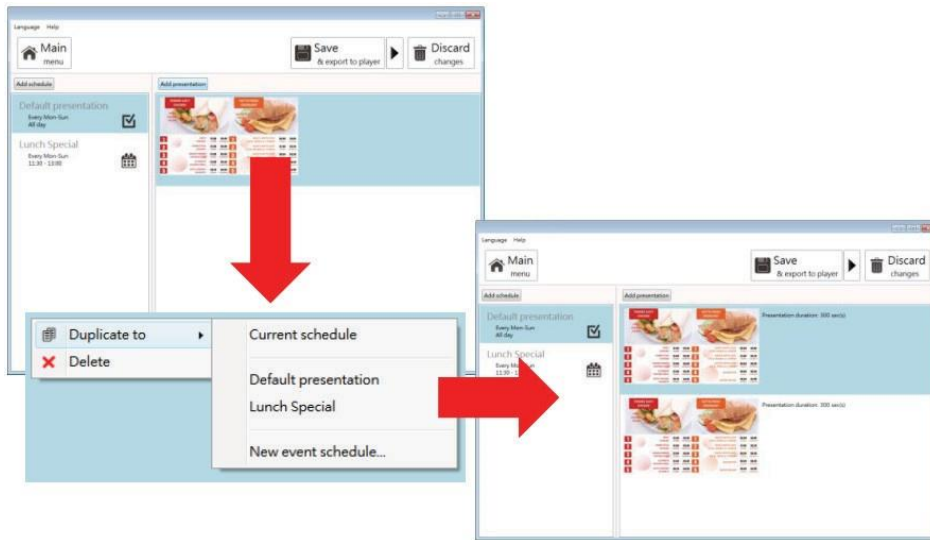

1. Right click a presentation and select "Duplicate to"
2. Select a destination:
 - Current schedule
 - An existing schedule
 - New event schedule


4.3.9 Duplicate an event

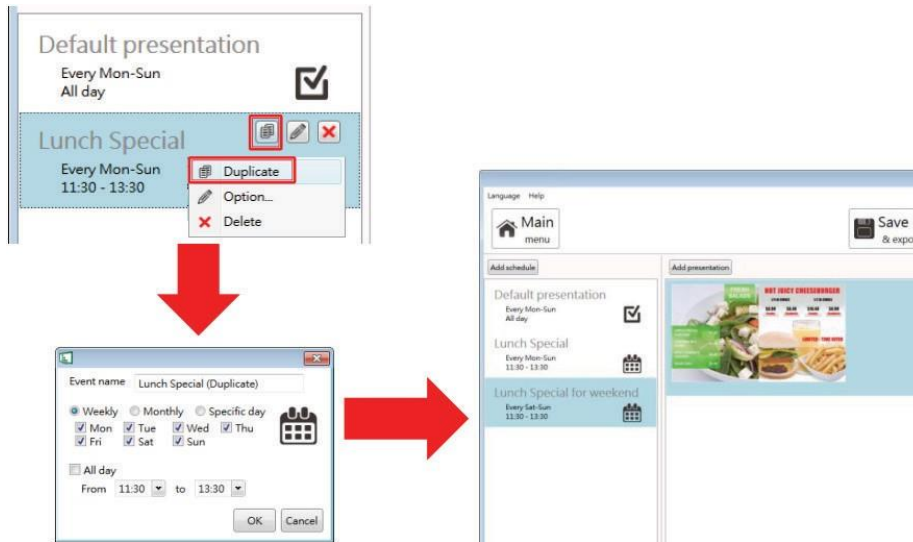

1. Right click a schedule and select "Duplicate or click duplicate button of a schedule"
2. Edit schedule of new event
3. Click OK to save new event

4.3.10 Adding trigger event

Enable event trigger and add trigger to current presentation

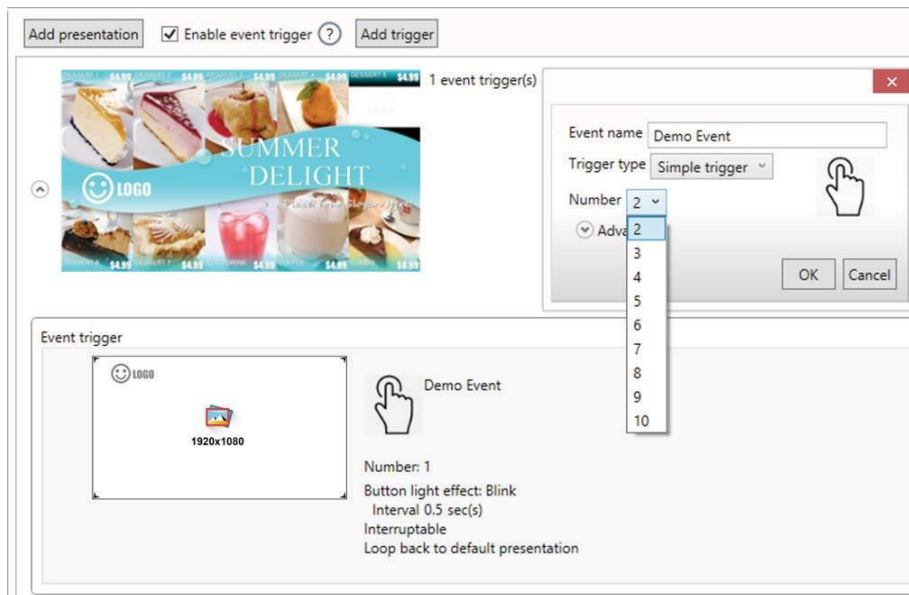

Trigger Event lets you to add event trigger into presentation, the trigger source can be touch button event and motion sensor event from ePoster, or input event from GPIO board.

Trigger Event Editor



- 1 Name of the trigger event
- 2 Trigger type: simple trigger or motion sensor
- 3 Schedule up to 10 simple triggers
- 4 Advanced: control for simple trigger
- 5 Advanced: control button light effect
- 6 Advanced: option to disable interrupt for the trigger
- 7 Advanced: option to disable loop back to default presentation

4.4 Export Playlist

4.4.1 Export playlist via USB

Click export button and click Export to USB, and then select the correct location for export.




Note: Signage Manager will remember your action, so next time you only need to click 'Save' to export.

4.4.2 Export playlist via Network

1. Click export button and click Export to player.




2. Scan devices on your network or add them by typing their IPs.

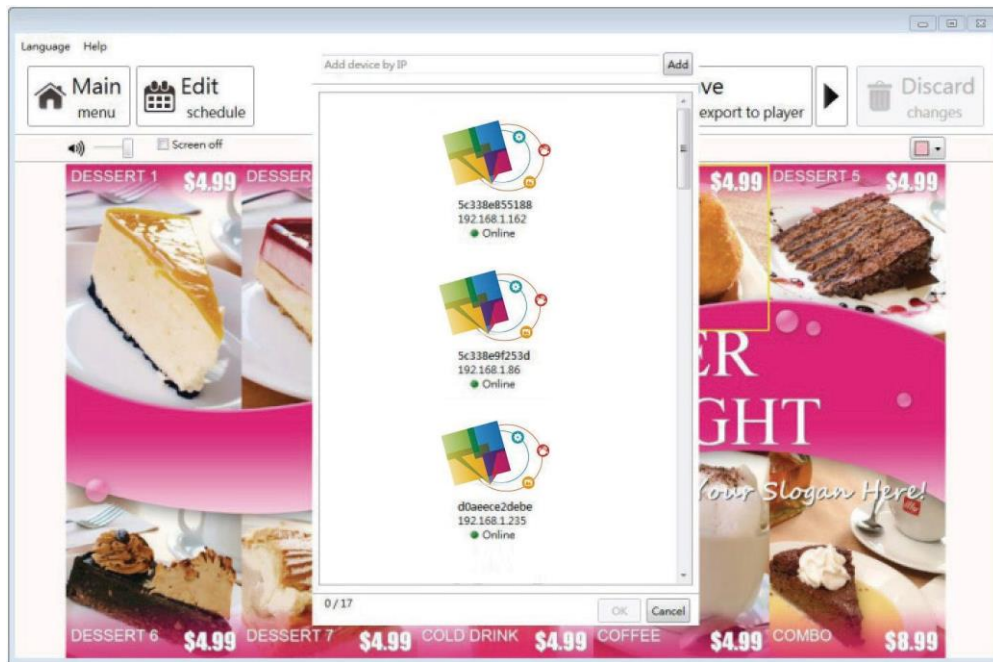

Note: If a player is already associated with another playlist, it will not show in this list, please search by its IP address.


3. Select devices for export.
4. After export, the selected players will be associated with this playlist.
5. Exporting status displays in main menu as well:

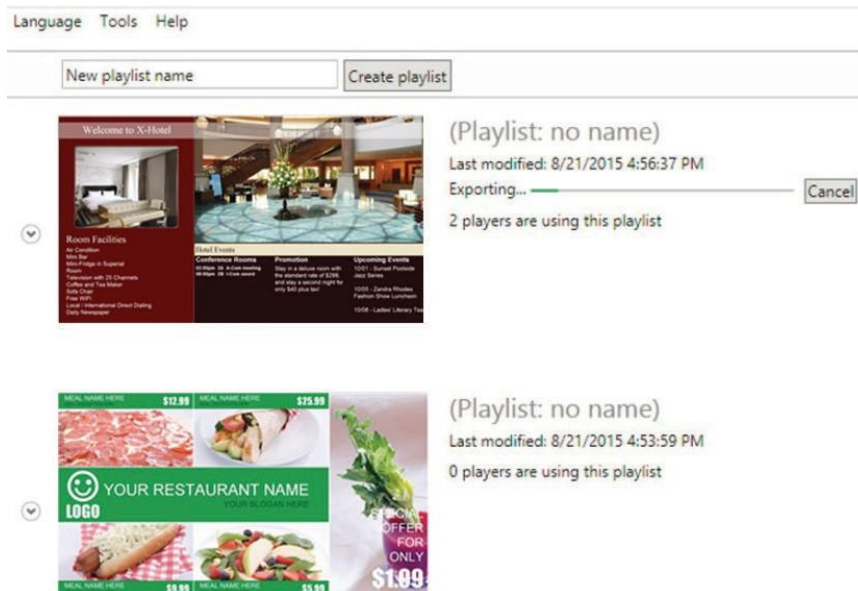

4.4.3 Player association


After export, the players are associated with the playlist and will be listed under the playlist in the main menu.

You can also assign player to playlist by dragging player and drop to playlist in the main menu.

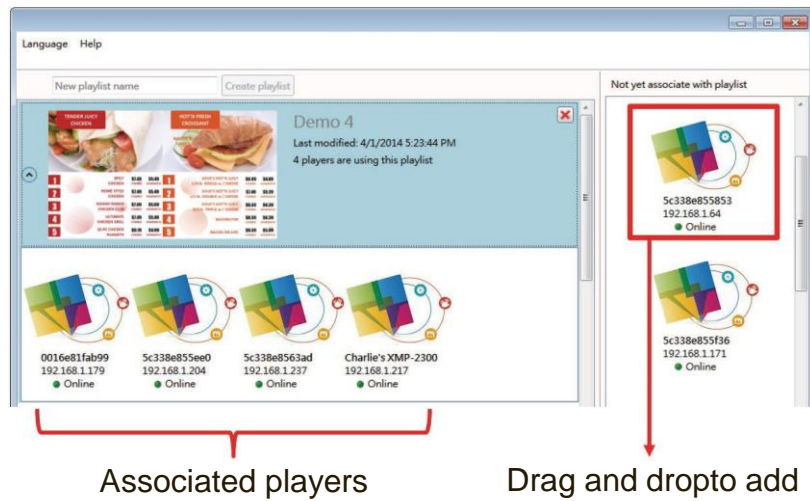


4.5 Serial protocol (RS232) configuration


1. Go to Tool → Edit serial protocol (RS232)

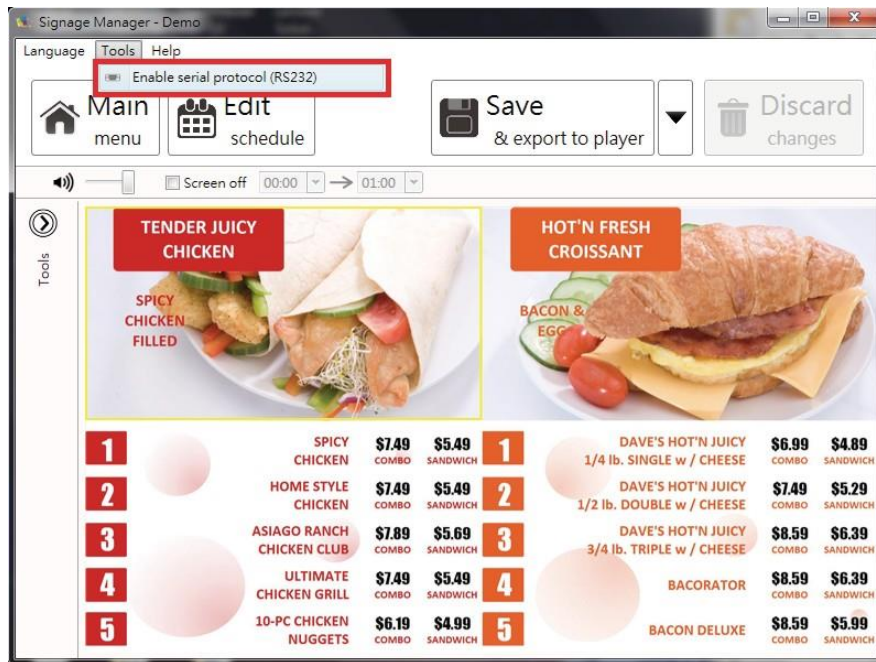

2. To create new protocol or select existing protocol.

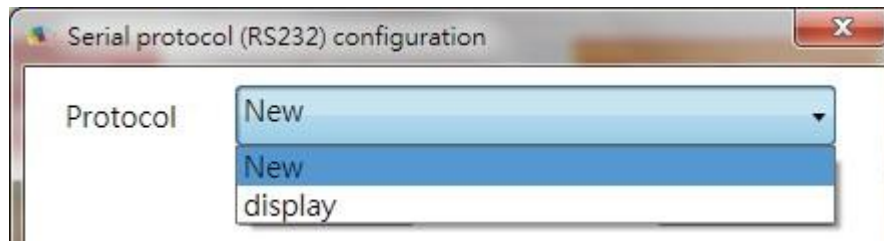

3. To select Baud rate.

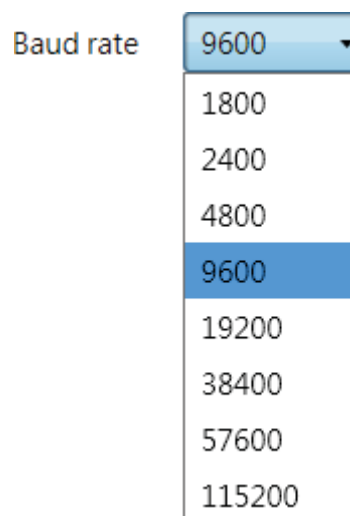

4. To select Send EOL message.

Send EOL

CR
CR
LF
CR+LF

5. To key-in Commands.

Commands

Video on	899s!001	Video off	899s!000
----------	----------	-----------	----------

6. To save & select new protocol or select existing protocol directly.

Save & select protocol

Select protocol


7. To set the Screen off schedule.

For example, screen off schedule is 20:00→08:00, device will send Video off command at 20:00, and send Video on command at 08:00 to RS232 port.

Screen off 20:00 → 08:00

4.6 Firmware Update


1. Go to Help → Firmware update, select the Firmware package and click OK
2. Select the player you need to update.

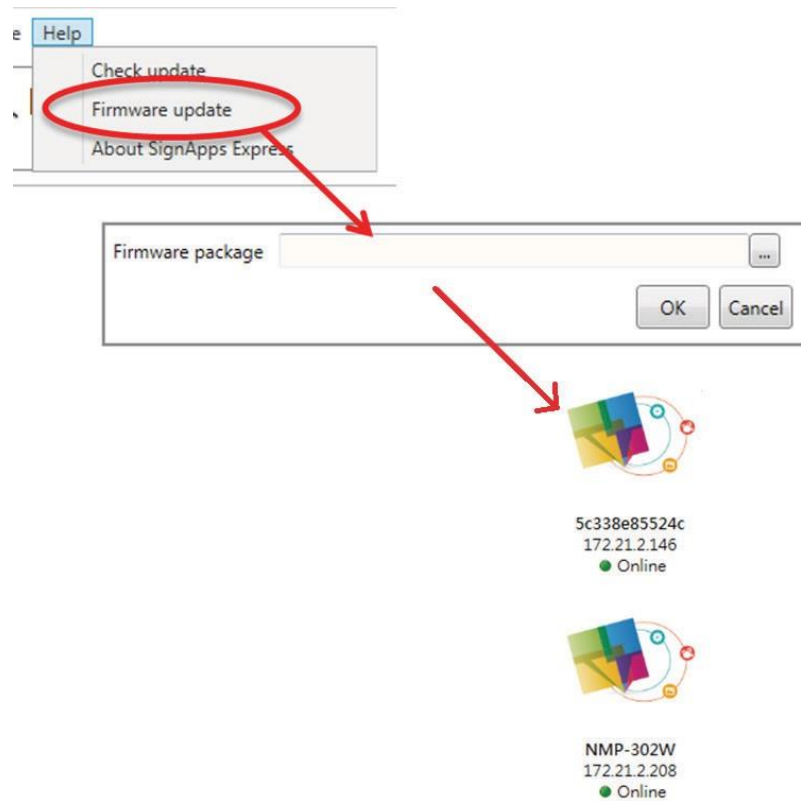


4.7 Widget Update

4.7.1 Update the widget


Click the 'update widgets' to update widget from 'Help'.

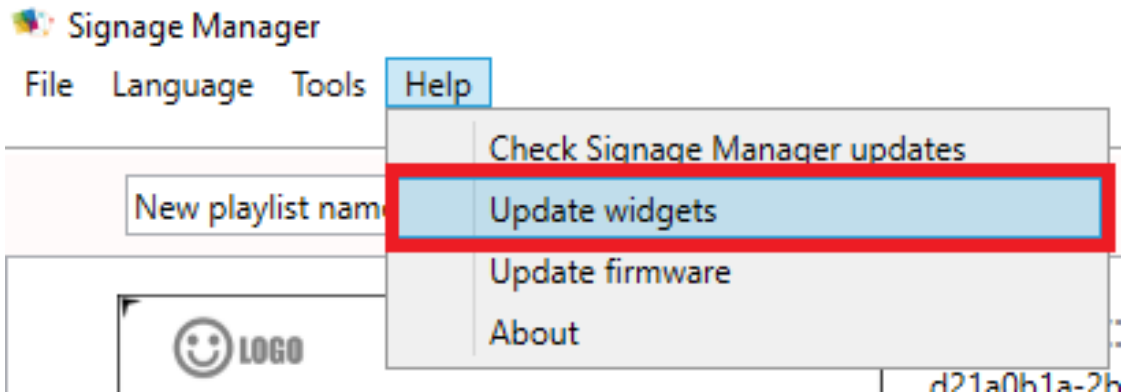


You will see Widget Update' dialog shown to let user choose the widgets

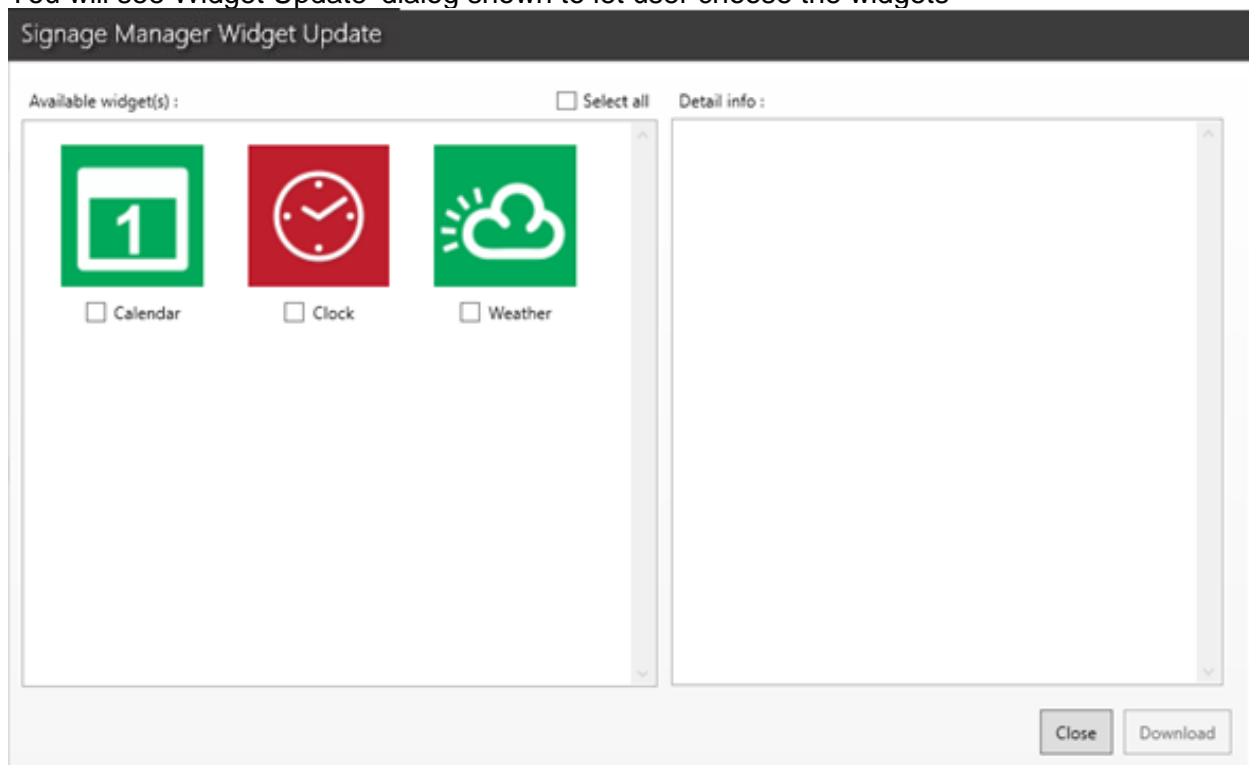

Left panel show available widget(s) to update (support multi-select).
 Right panel show the update information when user choose a widget from the left panel

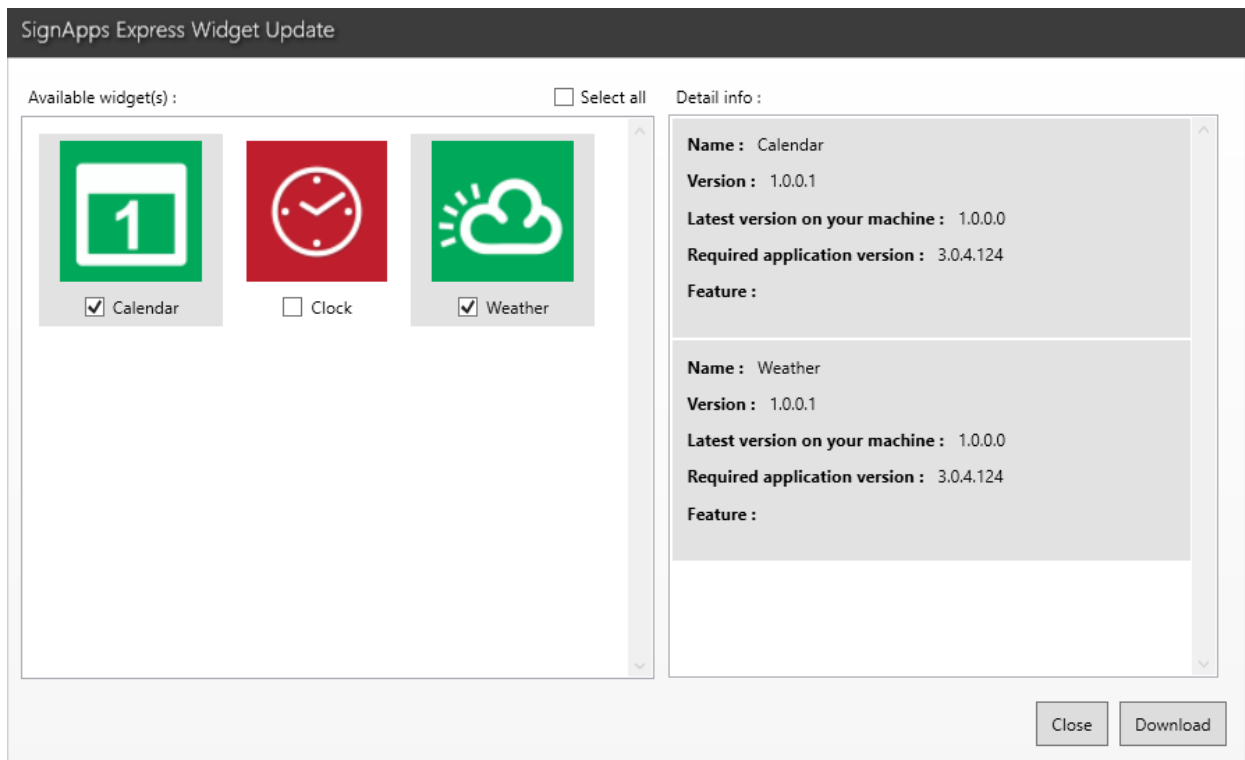


When click download, SignApps will ask if to keep only the latest version for updated widgets

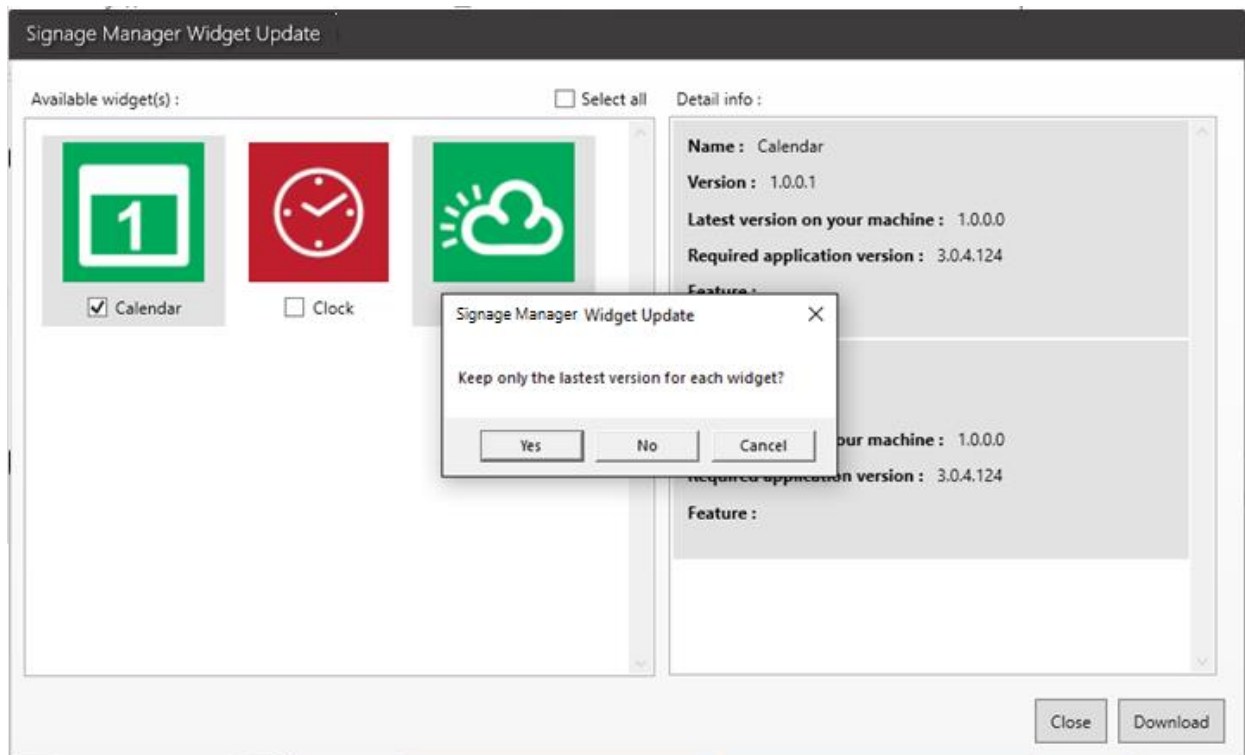

Options	Results
Yes	All old widgets will be removed, only the new widgets will be reserved.
No	Keep both the old widgets and the newly updated widgets.


4.7.2 Use the widget

If a widget has another old version, user could choose the old version.
The 'Select other widget' button is for user to select other local widgets

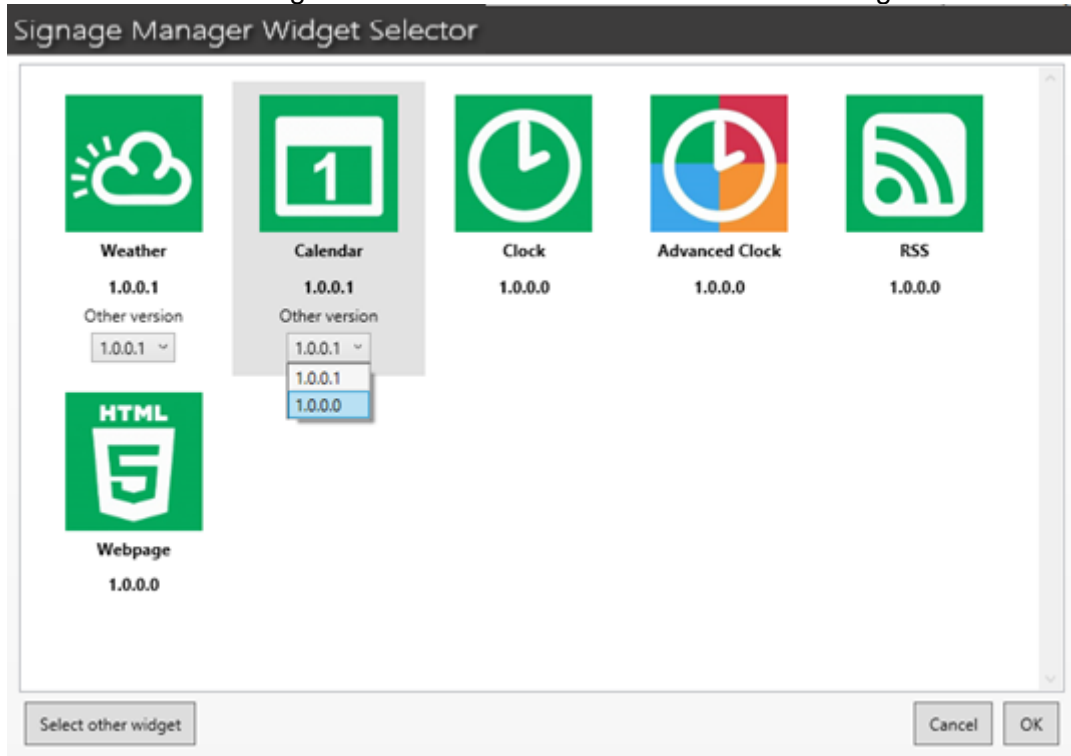

4.8 Update Signage Manager


Click on 'Check Signage Manager Updates' from 'Help'

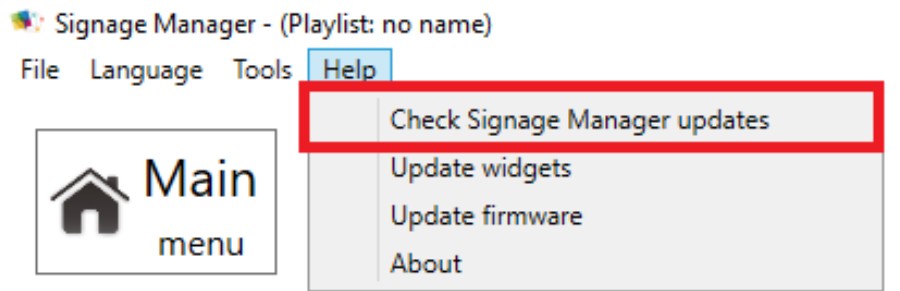


The software will instruct you if a new version is available for upgrade.

4.9 Layout Editor

Click 'Create new layout' from 'Tool'

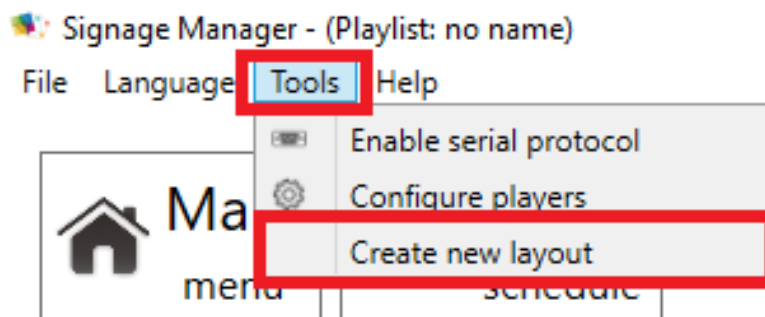

Click 'New' to create a new layout

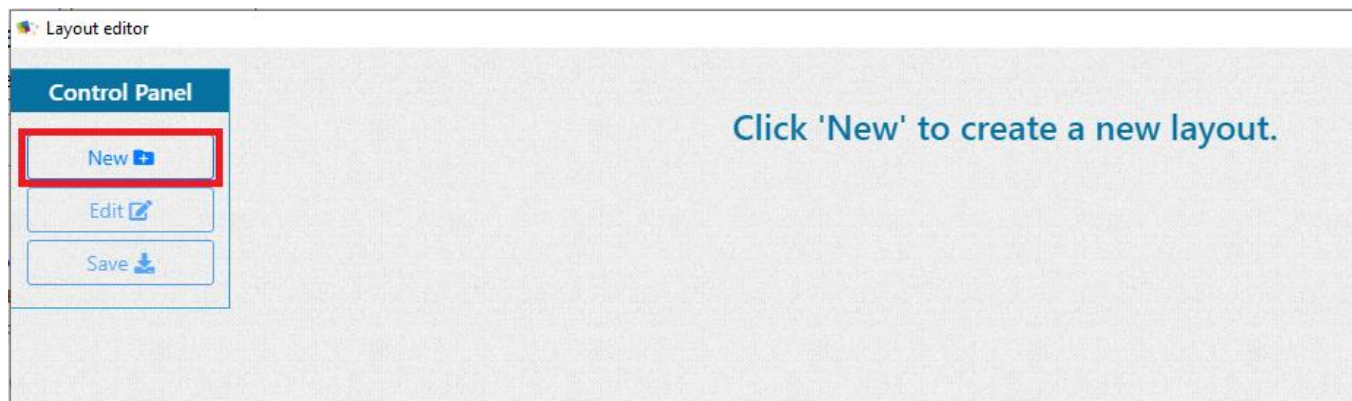

Input the Company name, the size of the layout and choose Zone count from drop menu

Layout settings [X]

Company **1** Viewsonic

Size **2**

Width 1920 (150 ~ 3840 px) Default size ▾

Height 1080 (150 ~ 3840 px)

Layout template **3**


Zone count 4 ▾ Show All

4 zones-1 zones-3 4 zones-4 4 zones-5

Cancel OK


- 1** The Company name of the layout.
- 2** Input the size manually or choose from the default list
- 3** Choose the Zone count from drop-down menu and choose the template.

Edit the global settings, background and anchor info.

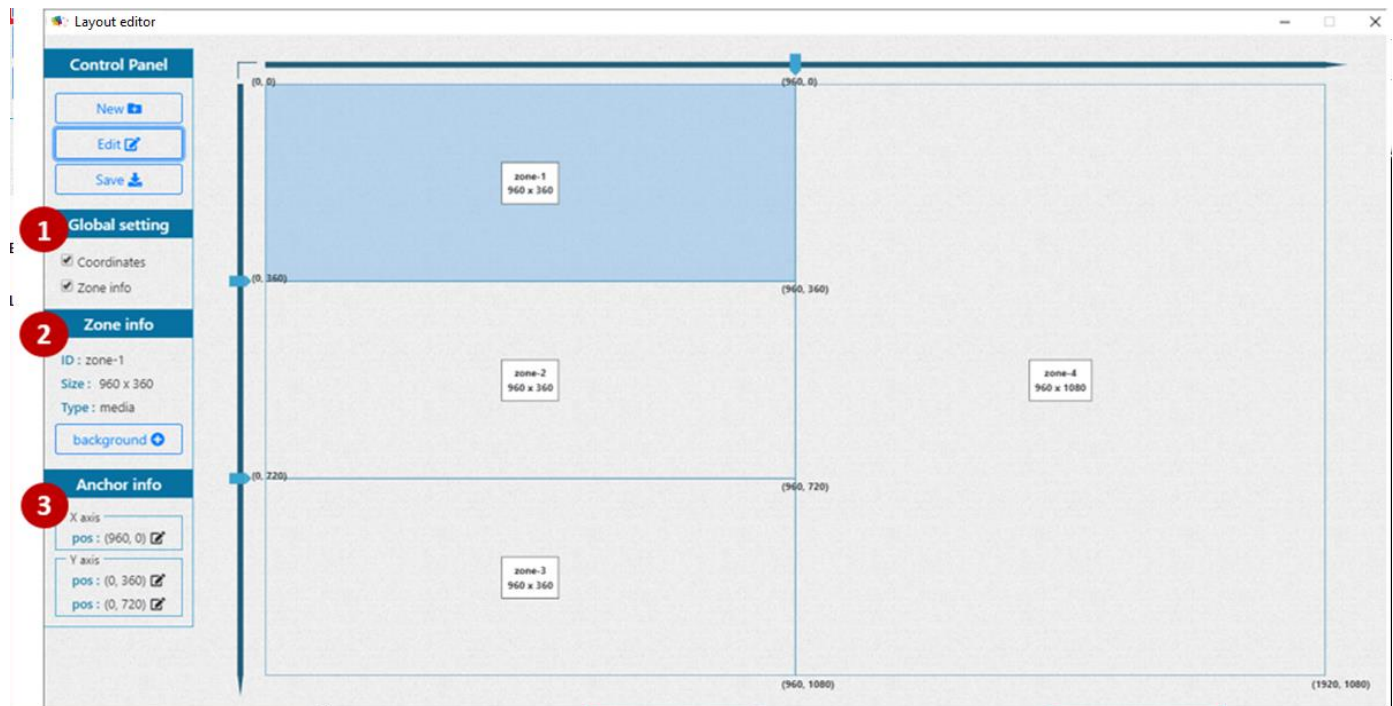

- 1 Check it to display the coordinates and zone info in the template area.
- 2 Display the info of each zone and add the background image for each zone.
- 3 Edit the anchor info manually or drag the anchor in the template area directly.

Make sure to add the background to each zone then click 'Save' to save the template.

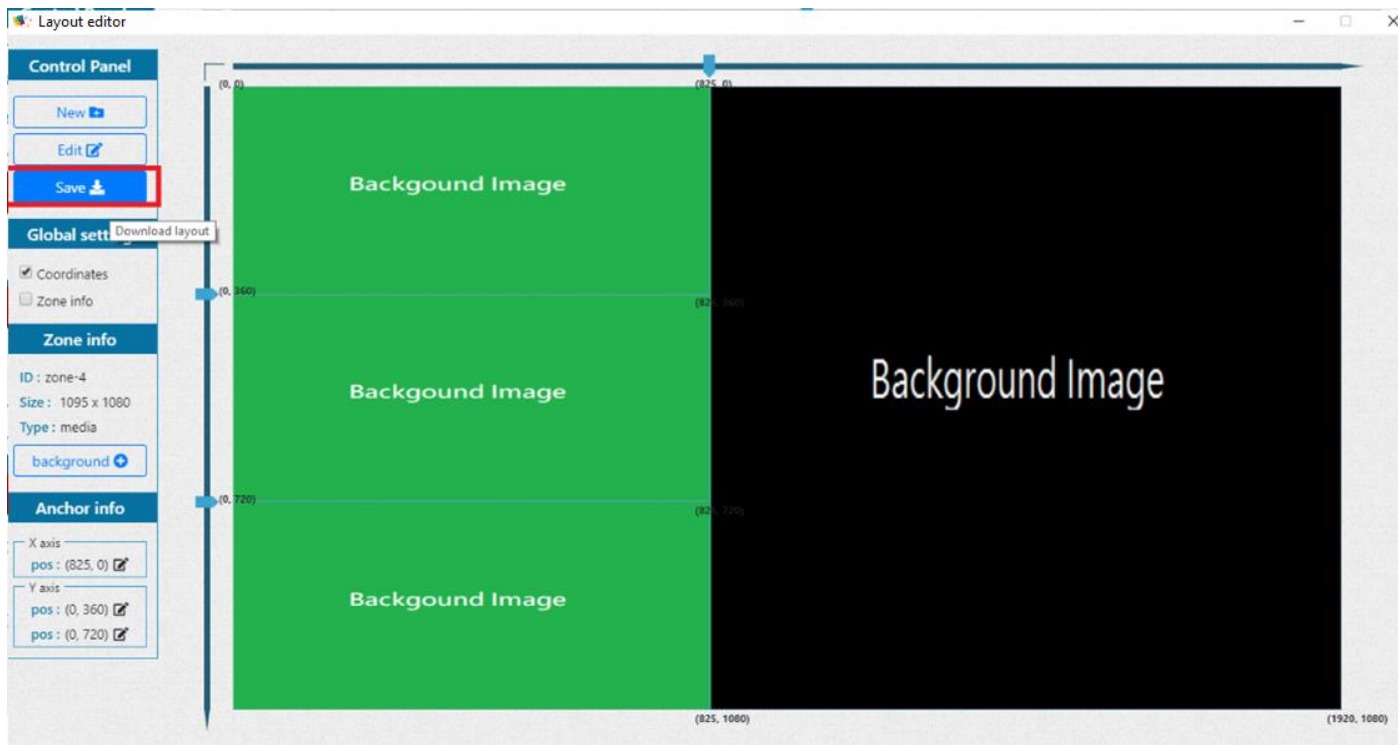

Go back to main page to create a new playlist, you will see the template is listed in the template list.



Other Information

Customer Support

For technical support or product service, see the table below or contact your reseller.

NOTE: You will need the product serial number.

Country/Region	Website	T = Telephone C = CHAT ONLINE	Email
Australia New Zealand	www.viewsonic.com.au	AUS= 1800 880 818 NZ= 0800 008 822	service@au.viewsonic.com
Canada	www.viewsonic.com	T (Toll-Free)= 1-866-463-4775 T (Toll)= 1-424-233-2533	service.ca@viewsonic.com
Europe	www.viewsoniceurope.com	www.viewsoniceurope.com/uk/support/call-desk/	
Hong Kong	www.hk.viewsonic.com	T= 852 3102 2900	service@hk.viewsonic.com
India	www.in.viewsonic.com	T= 1800 419 0959	service@in.viewsonic.com
Korea	ap.viewsonic.com/kr/	T= 080 333 2131	service@kr.viewsonic.com
Latin America (Argentina)	www.viewsonic.com/la/	C= http://www.viewsonic.com/la/soporte/servicio-tecnico	soporte@viewsonic.com
Latin America (Chile)	www.viewsonic.com/la/	C= http://www.viewsonic.com/la/soporte/servicio-tecnico	soporte@viewsonic.com
Latin America (Columbia)	www.viewsonic.com/la/	C= http://www.viewsonic.com/la/soporte/servicio-tecnico	soporte@viewsonic.com
Latin America (Mexico)	www.viewsonic.com/la/	C= http://www.viewsonic.com/la/soporte/servicio-tecnico	soporte@viewsonic.com
Nexus Hightech Solutions, Cincinnati #40 Desp. 1 Col. De los Deportes Mexico D.F. Tel: 55) 6547-6454 55)6547-6484 Other places please refer to http://www.viewsonic.com/la/soporte/servicio-tecnico#mexico			
Latin America (Peru)	www.viewsonic.com/la/	C= http://www.viewsonic.com/la/soporte/servicio-tecnico	soporte@viewsonic.com
Macau	www.hk.viewsonic.com	T= 853 2870 0303	service@hk.viewsonic.com
Middle East	ap.viewsonic.com/me/	Contact your reseller	service@ap.viewsonic.com
Puerto Rico & Virgin Islands	www.viewsonic.com	T= 1-800-688-6688 (English) C = http://www.viewsonic.com/la/soporte/servicio-tecnico	service.us@viewsonic.com soporte@viewsonic.com
Singapore/ Malaysia/ Thailand	www.ap.viewsonic.com	T= 65 6461 6044	service@sg.viewsonic.com
South Africa	ap.viewsonic.com/za/	Contact your reseller	service@ap.viewsonic.com
United States	www.viewsonic.com	T (Toll-Free)= 1-800-688-6688 T (Toll)= 1-424-233-2530	service.us@viewsonic.com



ViewSonic®